

> Turbinas centrífugas simple oído

REFER.	EJE	Ø	ANCHO
SA-6.85	6	85	34
SA-8.97	8	97	40
SA-9.120	9	120	52
SA-9.140	9	140	52
SA-9.180	9	180	74
SA-11.146	11	146	52
SA-11.160	11	160	62
SA-14.160	14	160	62
SA-14.180	14	180	74
SA-14.200A	14	200	60
SA-14.200B	14	200	62
SA-14.200C	14	200	82
SA-19.180	19	180	74
SA-19.200	19	200	82
SA-19.225	19	225	92
SA-19.250	19	250	102
SA-24.225	24	225	92
SA-24.250	24	250	102
SA-24.280	24	280	112
SA-28.250	28	250	102


REFER.	EJE	Ø	ANCHO
SA-28.280	28	280	112
SA-28.310	28	310	122
SA-28.355	28	355	143
SA-28.400	28	400	160
SA-28.450A	28	450	183
SA-28.450B	28	450	180
SA-28.455	28	455	180
SA-38.355	38	355	143
SA-38.400	38	400	160
SA-38.450	38	450	180
SA-38.455	38	455	180
SA-38.500	38	500	200
SA-42.500	42	500	200
SA-42.630	42	630	250



TURBINAS DE SIMPLE ASPIRACIÓN

- Construidas en acero galvanizado.
- Equilibrado, clase Q 6,3.
- Rotación horaria standard, antihoraria en opción.

> Turbinas centrífugas doble oído

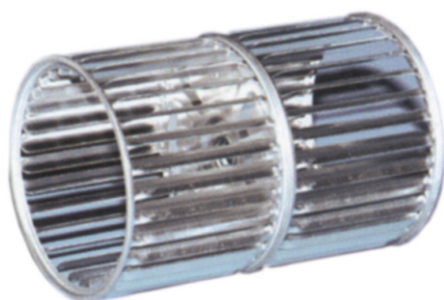

REFER.	Diámetro	Largada	Eje
V12	133	176	12.7
V14	146	148	12.7
V15	146	176	12.7
V16	146	196	12.7
V17	160	176	12.7
V18	185	240	12.7
V19	200	190	12.7